DUPLICATE

ORIGINAL

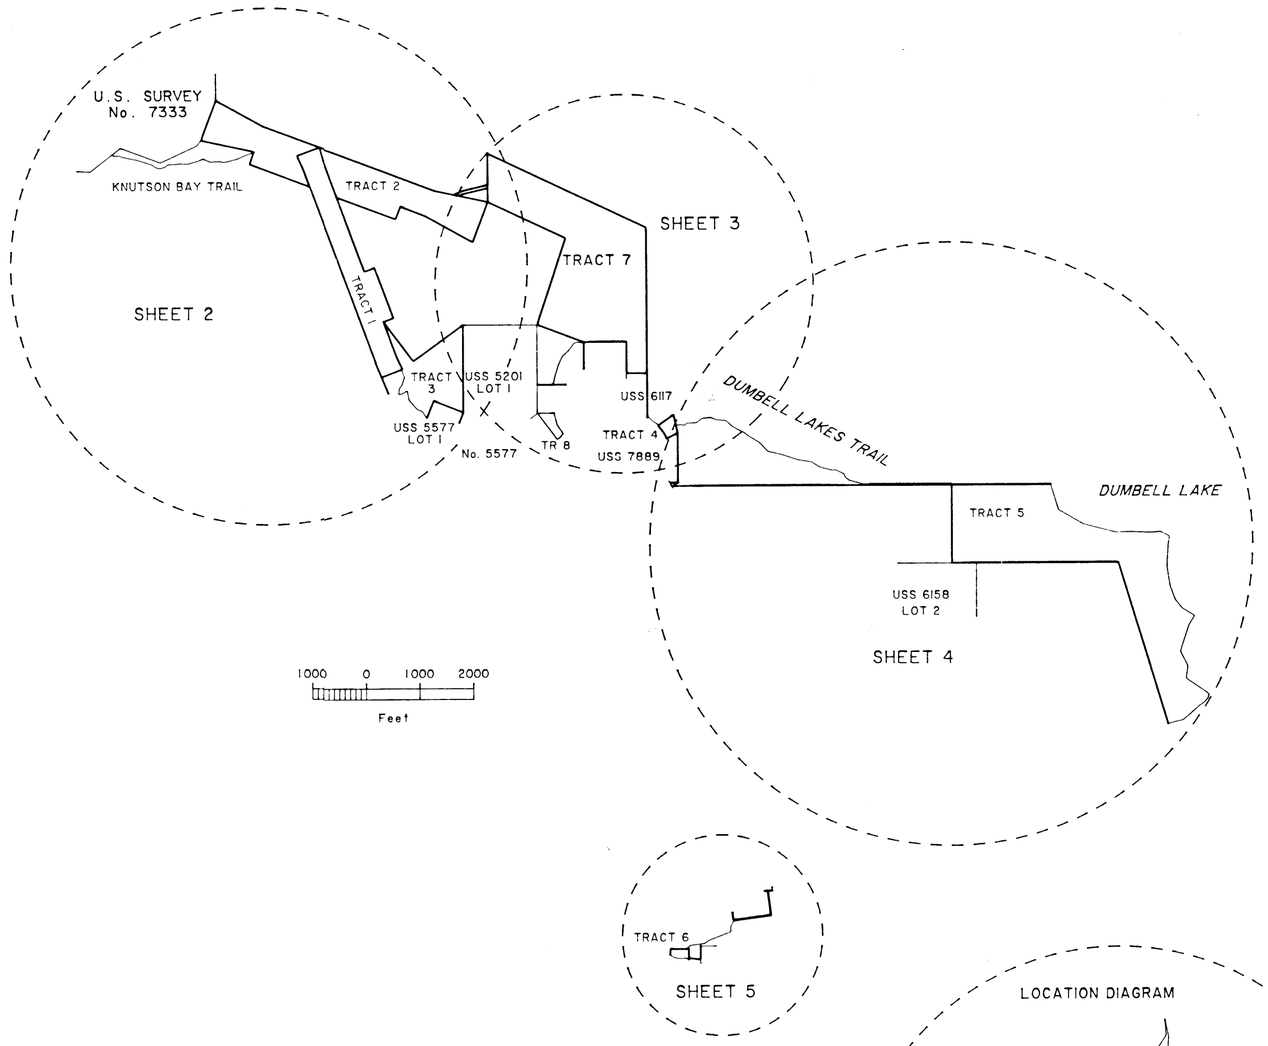

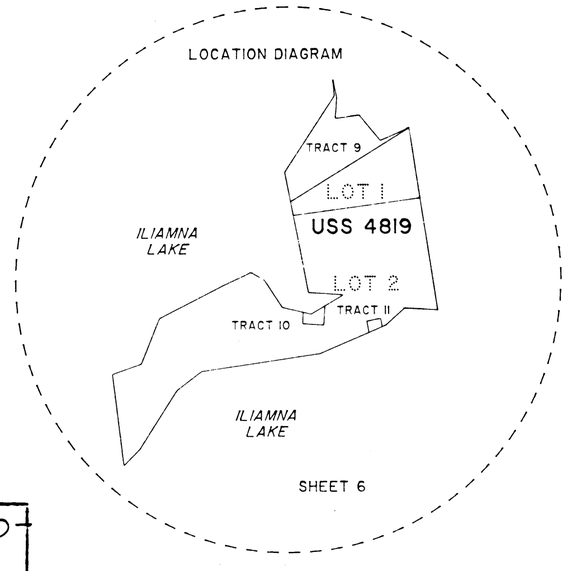

I hereby certify that Tracts 1 through 11 represented on this plat of survey are on lands Interim Conveyed to the Pedro Bay Corporation by Interim Conveyance No. 359 and Patent Numbers 50-80-0127 and 50-90-0671 issued by the United States of America; said tracts also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by the Pedro Bay Corporation, Resolution Agreement Nos. 81-1, 82-3, 85-2, 85-3, 85-19, and the Pedro Bay ANCSA 14(c) Map of Boundaries approved June 5, 1986.

OCT. 16- 1992 — Date

President, Pedro Bay Corporation

I, John A. Pex, Cadastral Surveyor, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1 through 11, in conformity with the Special Instructions approved July 28, 1986, Amended Special Instructions approved October 5, 1989, and Amended Special Instructions approved June 22, 1990, the principles of survey described in the Manual of Instructions, 1973, and in the specific manner described on this plat.

[illegible] — Date

Cadastral Surveyor

J.A.P.

92-10

RECORDED - FILED 70
ILIAMNA REC. DIST.
DATE 10/26 19 92
TIME 11:10 A.M.
Requested by (USA/BLM)
Address

SHEET I OF II

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS I THROUGH II (P.L. 92-203, 85 STAT. 688, 702, 703) PEDRO BAY CORPORATION AT PEDRO BAY, ALASKA

AND

THE RETRACEMENT OF PORTIONS OF U.S. SURVEY Nos. 5552, 5577, 5201, 6117, 6175, 6158, 6160, 7525, 7962, 7889, AND 7333 AND THE SUBDIVISION OF LOTS I AND 2 OF U.S. SURVEY No. 4819 INTO 14(c) TRACTS 9, 10 AND 11

This plat contains the entire survey record.

The First Standard Parallel South along the south boundary of Township 4 South, Range 28 West, Seward Meridian, was surveyed by Richard P. Troeger, Alaska Registered Land Surveyor No. 4247-S, for ABC Surveys, Ltd., under contract, in 1977.

U.S. Survey No. 4819 was surveyed by Harold O. Temme, Supervisory Cadastral Surveyor, in 1965.

U.S. Survey Nos. 5577 and 5552 were surveyed by Hans W. Thielsen, Supervisory Cadastral Surveyor, in 1969.

U.S. Survey No. 5201 was surveyed by Mason W. Thayer, Supervisory Cadastral Surveyor, in 1974.

U.S. Survey No. 6117 was surveyed by William H. Twenhofel, Cadastral Surveyor, in 1978.

U.S. Survey No. 6175 was surveyed by Sherman E. Bell, Cadastral Surveyor, in 1978.

The Pedro Bay School Site Addition was surveyed by James A. Wilson, Alaska Registered Land Surveyor No. 4725-S, for Ted Forsi and Associates, Inc., in 1983.

U.S. Survey Nos. 6158 and 6160 were surveyed by Bryan S. Seibold, Cadastral Surveyor, in 1982.

U.S. Survey Nos. 7525 and 7962 were surveyed by Bryan S. Seibold, Cadastral Surveyor, in 1984.

U.S. Survey No. 7889 was surveyed by Brock R. Clifford, Cadastral Surveyor, in 1986.

U.S. Survey No. 7333 was surveyed by John A. Pex, Cadastral Surveyor, in 1987.

This survey was executed by John A. Pex and Milbert H. Krohn, Cadastral Surveyors, July 28, 1986 through August 21, 1990, in accordance with the principles set forth in the Manual of Surveying Instructions, 1973, Special Instructions approved July 28, 1986, Amended Special Instructions approved October 5, 1989, Amended Special Instructions approved June 22, 1990, and Assignment Instructions dated July 28, 1986 and June 30, 1990.

Field assistants were:

Douglas R. Talbot, Land Surveyor
Michael W. Beale, Land Surveyor
James W. Hawke, Jr., Land Surveyor
Daniel R. Ontiveros, Student Trainee (LS)
Todd M. Witthuhn, Surveying Technician

Area: 444.22 Acres.

The azimuth was obtained from the retracements of the U.S. Surveys retraced during the execution of this survey and verified by solar observations, and refers to the true meridian.

The geographic position of corner No. 1, Tract 2, identical with corner No. 6, U.S. Survey No. 7333, is:

Latitude: 59° 47' 57.17" North
Longitude: 154° 08' 32.20" West
NAD 27

The mean magnetic declination was obtained from U.S. Geological Survey quadrangle map "ILIAMNA (D-3)," Alaska, 1954 edition.

This survey is situated in and around the village of Pedro Bay, Alaska, within Townships 4 and 5 South, Ranges 28 and 29 West, Seward Meridian, Alaska.

The land is rolling hills, supporting thick forests of spruce and birch trees, with thick underbrush of alders and willows.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Anchorage, Alaska

The survey represented by this plat, SHEETS I - II, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director

/ Deputy State Director for Cadastral Survey, Alaska — OCT. 21, 1992 Date

DUPLICATE **ORIGINAL**

SHEET 2 OF II

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS I THROUGH II (P.L. 92-203, 85 STAT. 688, 702, 703) PEDRO BAY CORPORATION AT PEDRO BAY, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

U.S. SURVEY No. 7333

KNUTSON BAY TRAIL

Beginning at the intersection of Knutson Bay Trail and line 16-17 Tract 2. Thence with a traverse of the approximate centerline of Knutson Bay Trail, a 10 foot wide right-of-way.

1.	N. 75° 34' W.,	41.83 FT.	11.	S. 76° 21' W.,	50.45 FT.
2.	S. 67° 24' W.,	281.47 FT.	12.	S. 88° 38' W.,	146.68 FT.
3.	S. 75° 11' W.,	221.31 FT.	13.	S. 53° 51' W.,	82.35 FT.
4.	S. 88° 04' W.,	57.78 FT.	14.	S. 74° 47' W.,	91.79 FT.
5.	N. 72° 18' W.,	47.90 FT.	15.	N. 76° 39' W.,	67.09 FT.
6.	S. 86° 56' W.,	180.37 FT.	16.	N. 57° 17' W.,	107.01 FT.
7.	N. 67° 22' W.,	144.55 FT.	17.	N. 72° 40' W.,	285.32 FT.
8.	S. 68° 45' W.,	104.70 FT.	18.	N. 76° 38' W.,	271.28 FT.
9.	S. 74° 28' W.,	202.82 FT.	19.	N. 70° 06' W.,	70.23 FT.
10.	N. 87° 08' W.,	164.46 FT.	20.	S. 89° 55' W.,	95.20 FT.
			21.	N. 61° 37' W.,	39.86 FT.

At end of course, the intersection of Knutson Bay Trail and line 2-3, U.S. Survey No. 7333.

ENLARGED DIAGRAM 3

ENLARGED DIAGRAM I

ENLARGED DIAGRAM 2

SEE ENLARGED DIAGRAM 2

SEE ENLARGED DIAGRAM 3

SEE ENLARGED DIAGRAM I

TRACT 1 45.17

TRACT 2 78.05

TRACT 3 31.20

TRACT 7

U.S. SURVEY No. 6175 LOT 1

U.S. SURVEY No. 5201 LOT 1

U.S. SURVEY No. 5577 LOT 1

RETRACEMENT

RUNWAY CENTERLINE MONUMENT

PEDRO CREEK

NEW AIRPORT ROAD 60 FT. WIDE R.O.W.

W.P.

CL MON.

True Meridian

Mean Magnetic Declination 23° E.

Feet

TRACT 3 MEANDERS

Upstream along the marshy left bank of Pedro Creek, 1 ft. high.

1.	N. 3.° 46' W.,	148.00 FT.	7.	S. 86° 12' W.,	52.80 FT.
2.	N. 70° 49' W.,	86.46 FT.	8.	N. 5° 37' E.,	110.88 FT.
3.	N. 46° 50' W.,	66.00 FT.	9.	N. 40° 55' E.,	63.36 FT.
4.	N. 40° 06' W.,	176.22 FT.	10.	N. 20° 09' E.,	165.00 FT.
5.	N. 11° 26' W.,	176.22 FT.	11.	N. 22° 41' W.,	122.76 FT.
6.	S. 61° 21' W.,	126.72 FT.	12.	N. 11° 05' W.,	27.35 FT.

92-10

RECORDED - FILED 70
JUAMNA PEC DIST
DATE 10/26 19 92
TIME 11:10 A
Requested by (USA/Bur)
Address

J.A.P.

DUPLICATE **ORIGINAL**

SHEET 3 OF II

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS I THROUGH II (P.L. 92-203, 85 STAT. 688, 702, 703) PEDRO BAY CORPORATION AT PEDRO BAY, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

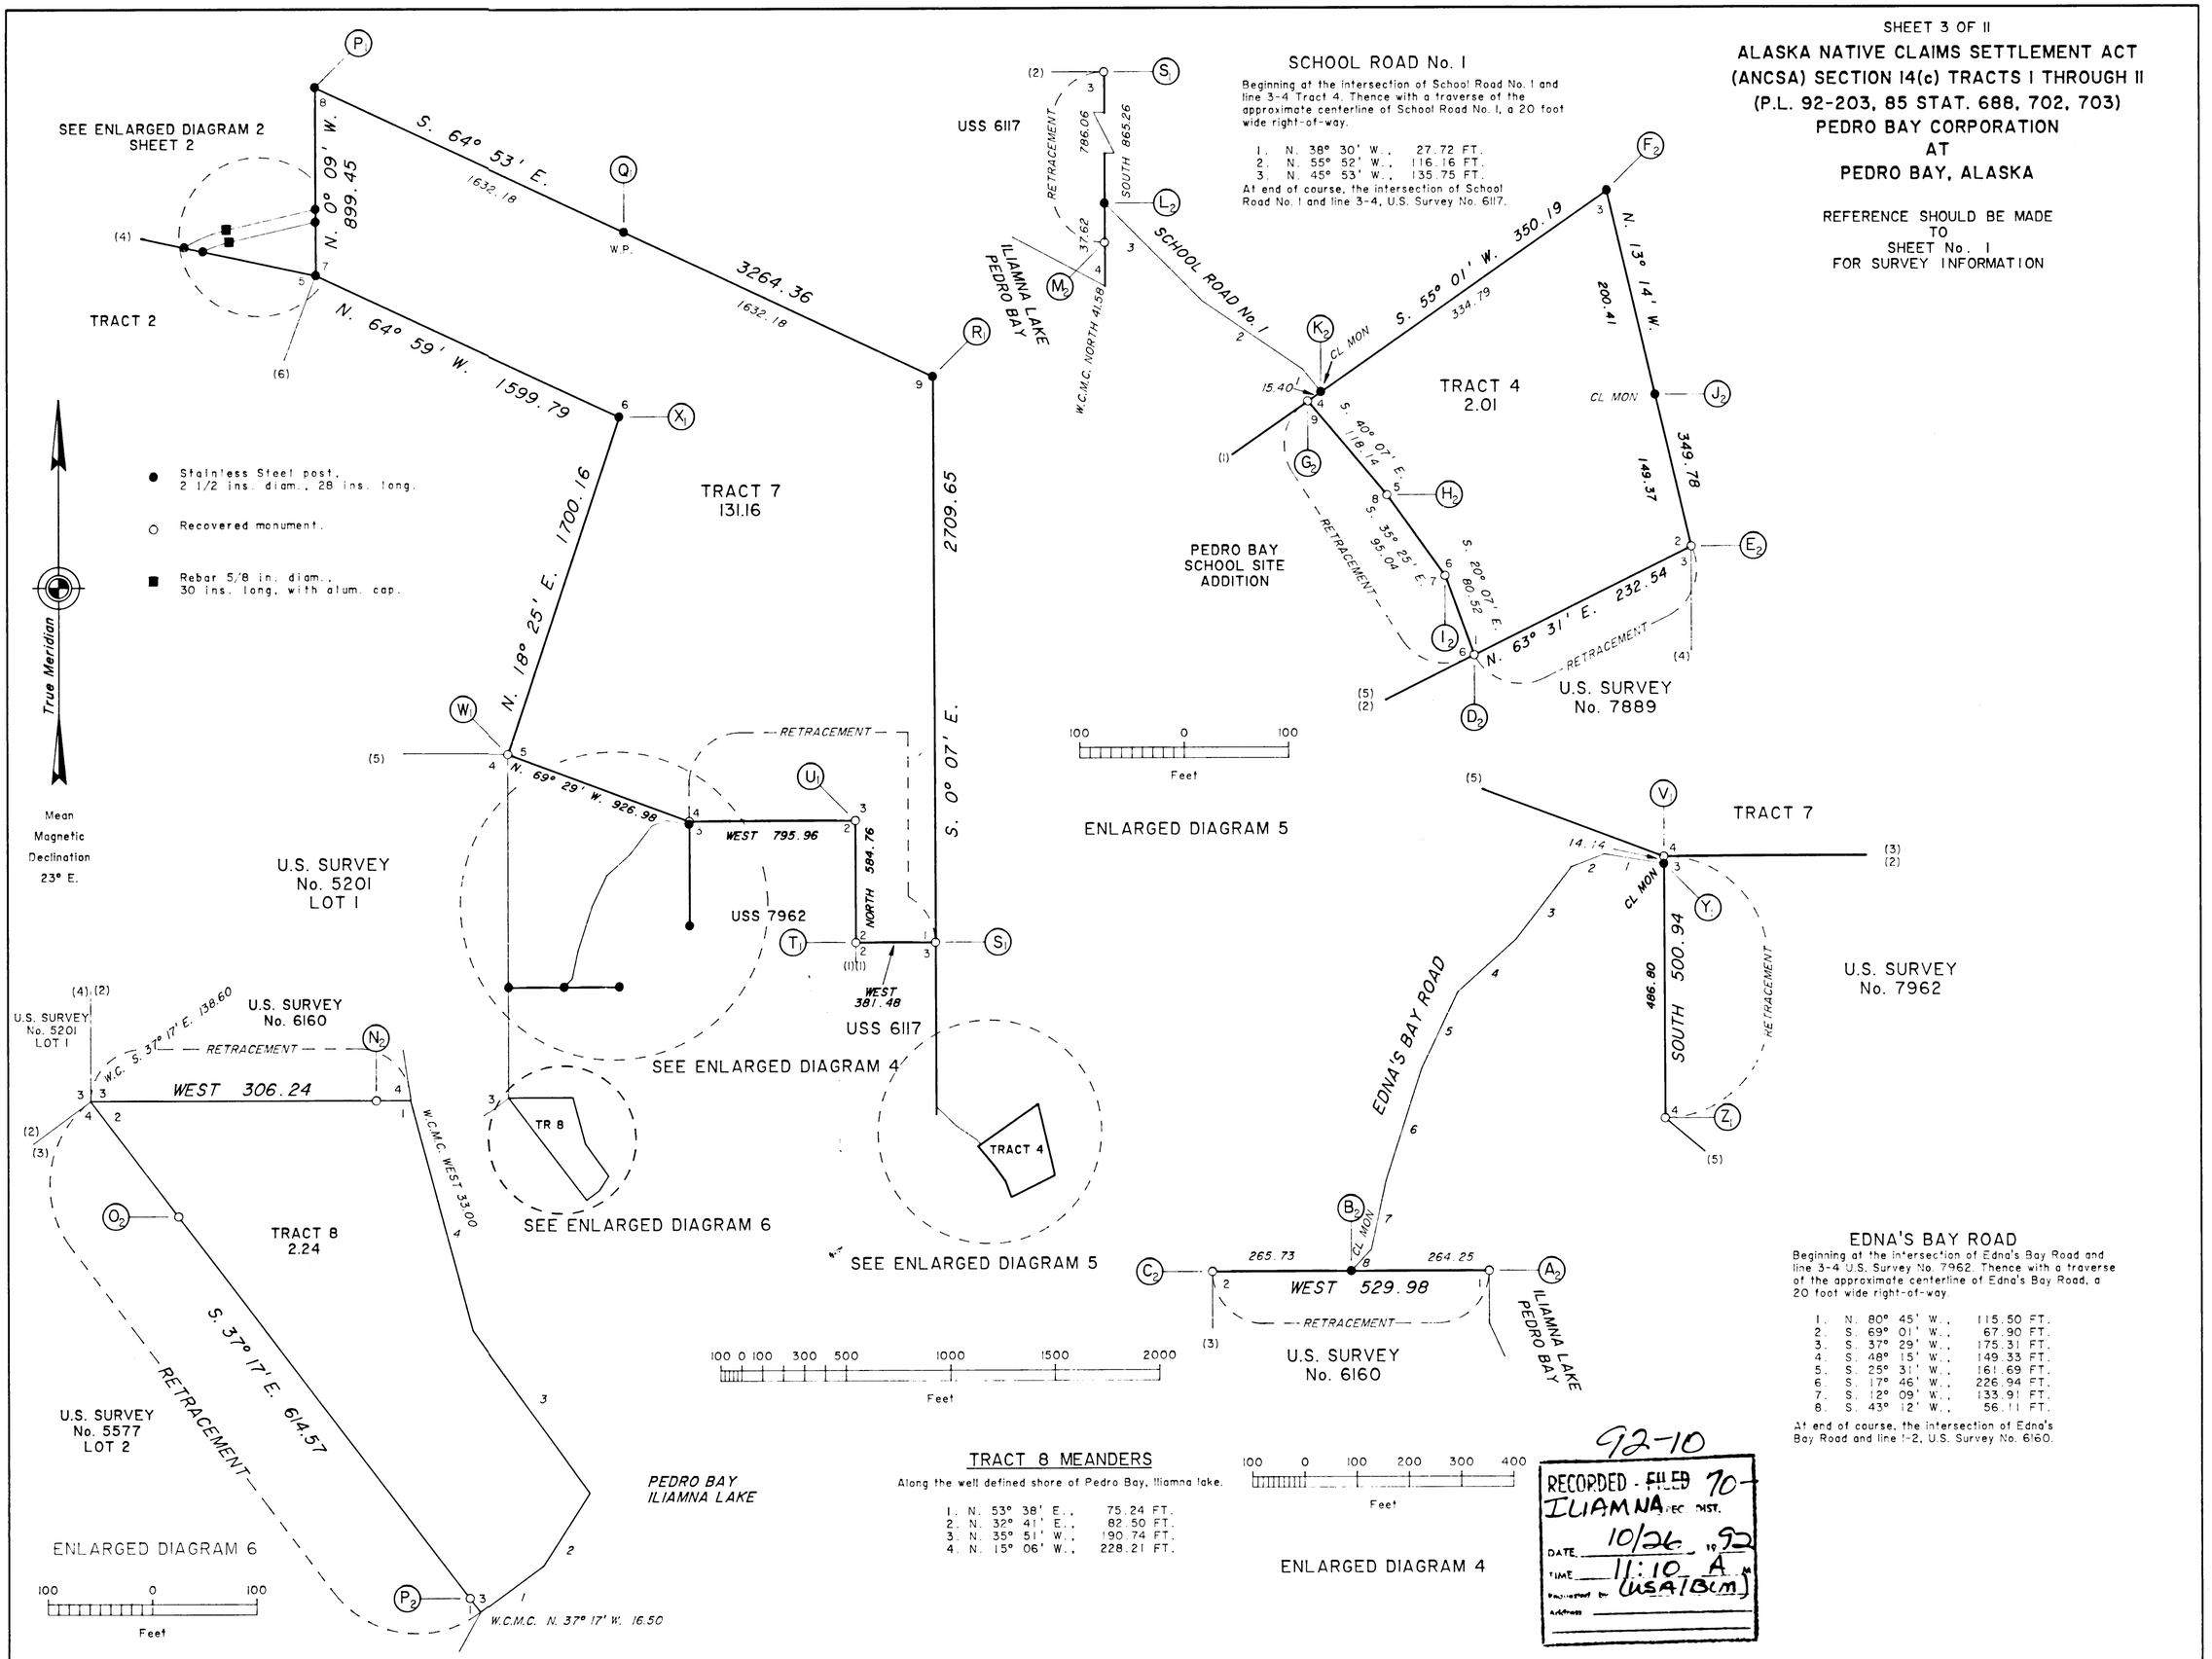

TRACT 8 MEANDERS

Along the well defined shore of Pedro Bay, Iliamna lake.

1. N. 53° 38' E., 75.24 FT.
2. N. 32° 41' E., 82.50 FT.
3. N. 35° 51' W., 190.74 FT.
4. N. 15° 06' W., 228.21 FT.

EDNA'S BAY ROAD

Beginning at the intersection of Edna's Bay Road and line 3-4 U.S. Survey No. 7962. Thence with a traverse of the approximate centerline of Edna's Bay Road, a 20 foot wide right-of-way.

1. N. 80° 45' W., 115.50 FT.
2. S. 69° 01' W., 67.90 FT.
3. S. 37° 29' W., 175.31 FT.
4. S. 48° 15' W., 149.33 FT.
5. S. 25° 31' W., 161.69 FT.
6. S. 17° 46' W., 226.94 FT.
7. S. 12° 09' W., 133.91 FT.
8. S. 43° 12' W., 56.11 FT.

At end of course, the intersection of Edna's Bay Road and line 1-2, U.S. Survey No. 6160.

92-10

RECORDED - FILED 70
ILIAMNA REC. DIST.
DATE 10/26 19 92
TIME 11:10 A M
Requested by (USATBCM)
Address

J.A.P.

ORIGINAL

DUPLICATE

SHEET 4 OF 11

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c) TRACTS I THROUGH II
(P.L. 92-203, 85 STAT. 688, 702, 703)
PEDRO BAY CORPORATION
AT
PEDRO BAY, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

DUMBELL LAKES TRAIL

Beginning at the intersection of Dumbell Lakes Trail and line 2-3 Tract 4. Thence with a traverse of the approximate centerline of Dumbell Lakes Trail, a 10 foot wide right-of-way.

1. N. 80° 47' E.,	89.83 FT.	16. S. 43° 49' E.,	240.37 FT.
2. S. 80° 59' E.,	79.03 FT.	17. S. 77° 39' E.,	114.94 FT.
3. N. 47° 50' E.,	55.92 FT.	18. S. 77° 14' E.,	128.80 FT.
4. N. 87° 34' E.,	172.03 FT.	19. S. 71° 34' E.,	164.32 FT.
5. N. 54° 49' E.,	131.73 FT.	20. S. 72° 02' E.,	183.81 FT.
6. N. 80° 19' E.,	51.11 FT.	21. S. 81° 22' E.,	242.46 FT.
7. N. 85° 31' E.,	113.96 FT.	22. S. 57° 39' E.,	181.61 FT.
8. S. 70° 47' E.,	115.44 FT.	23. S. 74° 36' E.,	218.60 FT.
9. S. 84° 19' E.,	174.81 FT.	24. S. 89° 32' E.,	93.13 FT.
10. S. 49° 08' E.,	161.41 FT.	25. S. 64° 53' E.,	157.84 FT.
11. S. 59° 45' E.,	121.68 FT.	26. S. 25° 07' E.,	76.74 FT.
12. S. 64° 26' E.,	127.91 FT.	27. S. 50° 44' E.,	95.33 FT.
13. S. 49° 53' E.,	84.50 FT.	28. S. 75° 34' E.,	137.06 FT.
14. S. 59° 04' E.,	118.03 FT.	29. S. 72° 38' E.,	121.07 FT.
15. S. 58° 48' E.,	129.81 FT.	30. EAST,	1647.85 FT.
		31. S. 63° 30' E.,	55.85 FT.

At end of course, the intersection of Dumbell Lakes Trail and line 1-5, Tract 5.

SEE ENLARGED DIAGRAM 5
SHEET 3

SEE ENLARGED DIAGRAM 7

U.S. SURVEY No.7889

TRACT 4

DUMBELL LAKES TRAIL

2605.02 EAST W.P. 2607.00 5212.02 30 25 31 S. 89° 57' W. 1849.33 W.C.M.C. S. 89° 57' W. 33.00

CL MON 50.00

RETRACEMENT

U.S. SURVEY No. 6158 LOT 1

SOUTH 1452.00

TRACT 5 149.76

STANDARD COR. S34, S35, T4S R28W

S. 19° 20' E. 492.55

DUMBELL LAKE

3100.22 EAST 460.68 2639.54

U.S. SURVEY No. 6158 LOT 2

S. 16° 58' E. 1021.09 3142.29 2121.20

W.P.

W.C.M.C. N. 16° 58' W. 28.38

RUSSIAN CREEK (LOCAL NAME)

DUMBELL LAKE

True Meridian

Mean Magnetic Declination 23° E.

ENLARGED DIAGRAM 7

N. 80° 47' E. 150.29

N. 14° 48' W. 150.29

SCHOOL ROAD No. 3
A 20 ft. (wide right-of-way)

SURVEYED BY BROCK R. CLIFFORD IN 1986

929.94 SOUTH 995.45 SOUTH

U.S. SURVEY No. 7889

W.C.M.C. EAST 49.50 EAST 139.92 W.C.M.C. EAST 33.00

79.20 60.72 63.19 69.30 2535.72 2605.02 W.P.

S. 12° 58' E. 64.53

CENTERLINE OF SCHOOL ROAD No. 2
A 20 ft. (wide right-of-way)

PEDRO BAY, ILIAMNA LAKE

EAST

U.S. SURVEY No. 6158 LOT 1

100 0 100 Feet

- Stainless Steel post, 2 1/2 ins. diam., 28 ins. long.
- ○ Recovered monument.
- ■ Rebar 5/8 in. diam., 30 ins. long, with alum. cap.

TRACT 5 MEANDERS

Upstream along the well-defined right bank of Russian Creek, (local name), and the southwesterly shore of Dumbell Lake.

1. N.	73° 47' E.,	159.72	FT.
2. N.	78° 01' E.,	128.04	FT.
3. N.	50° 46' E.,	149.82	FT.
4. N.	48° 24' E.,	259.38	FT.
5. N.	56° 06' E.,	96.36	FT.
6. N.	45° 07' E.,	109.56	FT.
7. N.	17° 34' E.,	81.18	FT.
8. N.	49° 55' W.,	68.64	FT.
9. N.	56° 20' W.,	456.30	FT.
10. N.	9° 19' E.,	231.00	FT.
11. N.	27° 07' W.,	306.24	FT.
12. N.	18° 15' E.,	522.06	FT.
13. N.	32° 28' E.,	203.28	FT.
14. N.	59° 54' W.,	268.62	FT.
15. N.	39° 12' W.,	209.88	FT.
16. N.	20° 04' W.,	277.20	FT.
17. N.	8° 34' W.,	369.60	FT.
18. N.	3° 23' E.,	412.50	FT.
19. N.	9° 45' E.,	149.16	FT.
20. N.	63° 02' W.,	76.56	FT.
21. N.	66° 02' W.,	112.20	FT.
22. S.	85° 35' W.,	175.56	FT.
23. N.	87° 43' W.,	363.00	FT.
24. S.	89° 07' W.,	296.34	FT.
25. N.	75° 41' W.,	619.74	FT.
26. N.	60° 04' W.,	533.94	FT.
27. N.	16° 54' W.,	490.37	FT.

92-10
RECORDED - FILED 70
ILIAMNA REC DIST.
DATE 10/26 19 92
TIME 11:10 A M
Requested by (USA/Bum)
Address

100 0 100 300 500 1000 1500 2000 Feet

J.A.P.

ORIGINAL

DUPLICATE

SHEET 5 OF 11

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c) TRACTS I THROUGH II
(P.L. 92-203, 85 STAT. 688, 702, 703)
PEDRO BAY CORPORATION
AT
PEDRO BAY, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

TRACT 6 MEANDERS

Along the well defined shore of Pedro Bay, on Iliamna Lake.

1.	S. 61° 38' E.,	102.96 FT.
2.	S. 77° 22' E.,	77.22 FT.
3.	N. 87° 42' E.,	124.74 FT.
4.	S. 80° 16' E.,	36.30 FT.
5.	S. 46° 21' E.,	32.34 FT.

BOAT YARD ROAD

Beginning at the intersection of Boat Yard Road and line 2-3 Tract 6. Thence with a traverse of the approximate centerline of Boat Yard Road, a 20 foot wide right-of-way.

1.	N. 52° 33' E.,	114.47 FT.
2.	N. 82° 29' E.,	261.18 FT.
3.	N. 56° 23' E.,	109.31 FT.
4.	N. 68° 53' E.,	432.75 FT.
5.	N. 4° 30' W.,	91.93 FT.
6.	N. 26° 30' E.,	113.95 FT.
7.	N. 82° 28' E.,	726.23 FT.
8.	N. 7° 23' W.,	471.32 FT.

At end of course, the intersection of Boat Yard Road and line 2-3, Lot 4, U.S. Survey No. 7525.

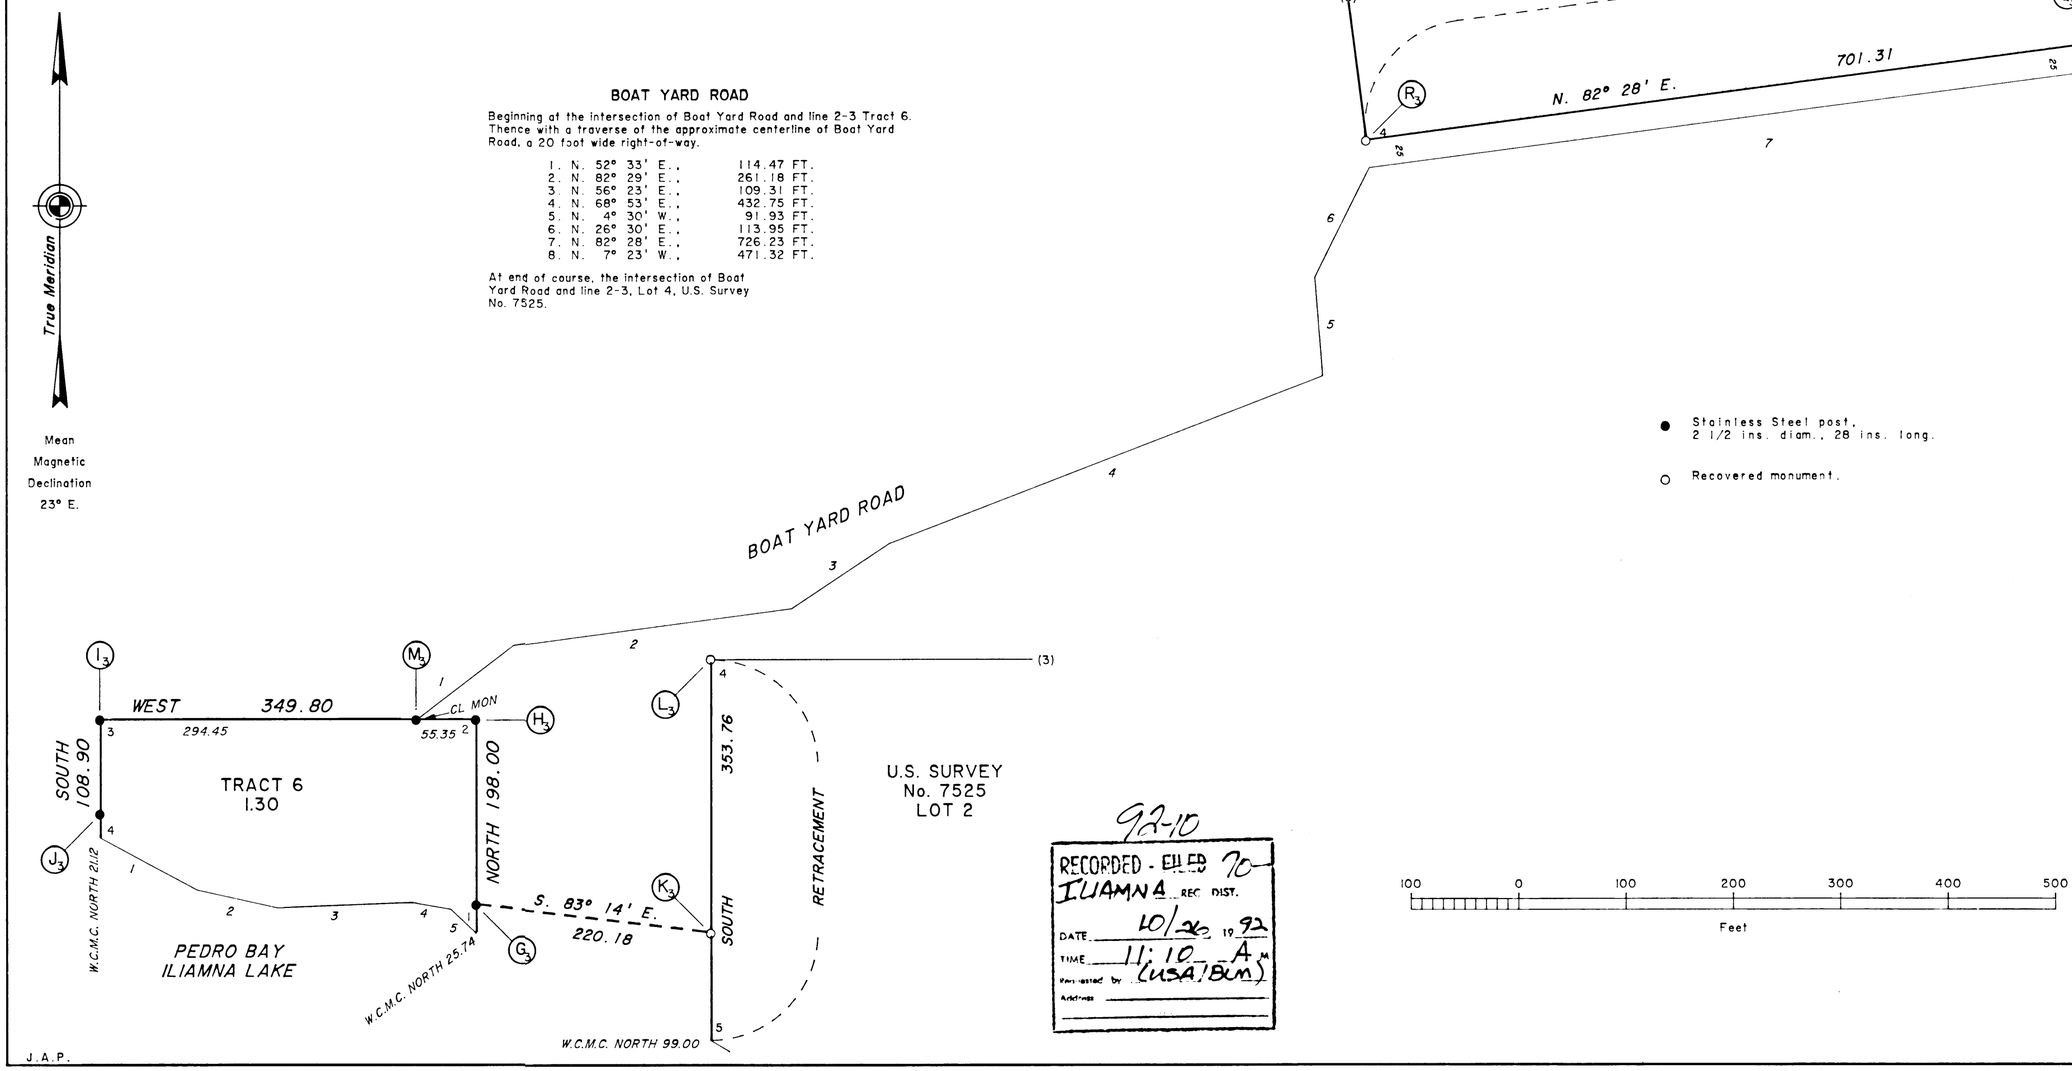

92-10

RECORDED - FILED 70
ILIAMNA REC. DIST.
DATE 10/26 1992
TIME 11:10 A.M.
Requested by (USA/BLM)
Address

J.A.P.

DUPLICATE **ORIGINAL**

SHEET 6 OF 11

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c) TRACTS I THROUGH II
(P.L. 92-203, 85 STAT. 688, 702, 703)
PEDRO BAY CORPORATION
AT
PEDRO BAY, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

LOCATION DIAGRAM

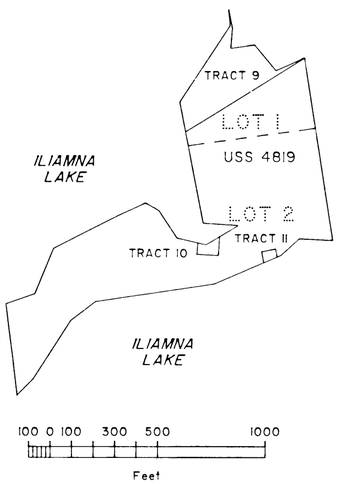



Mean
Magnetic
Declination
22 1/2° E.

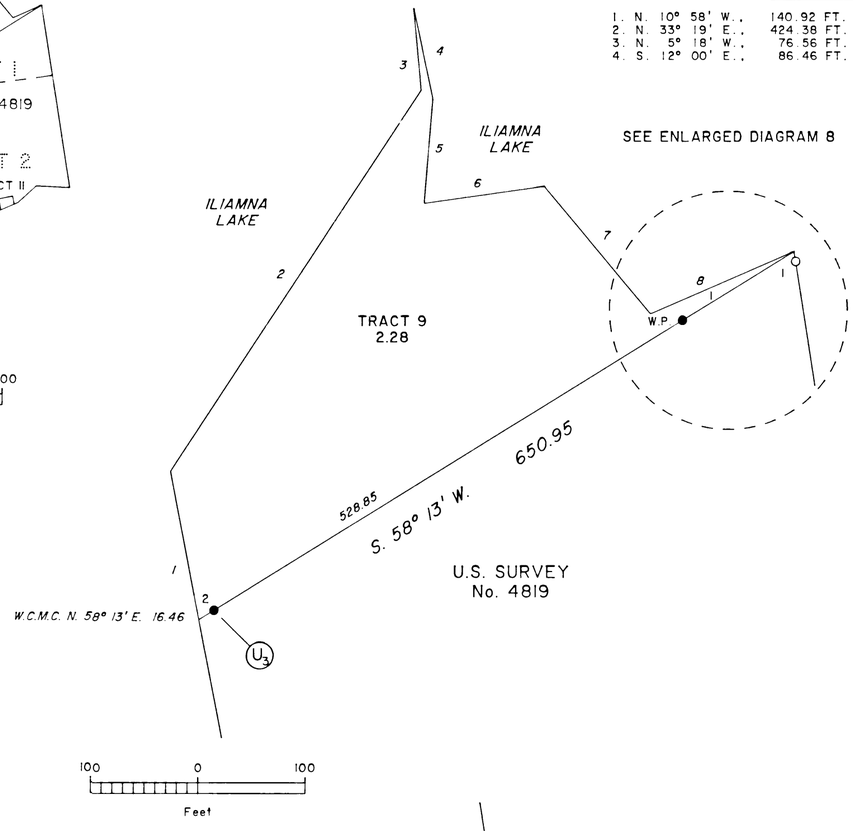

TRACT 9 MEANDERS

1. N. 10° 58' W.,	140.92 FT.		5. S. 4° 38' W.,	97.68 FT.	
2. N. 33° 19' E.,	424.38 FT.		6. N. 81° 51' E.,	112.86 FT.	
3. N. 5° 18' W.,	76.56 FT.		7. S. 39° 49' E.,	154.44 FT.	
4. S. 12° 00' E.,	86.46 FT.		8. N. 66° 25' E.,	145.86 FT.	

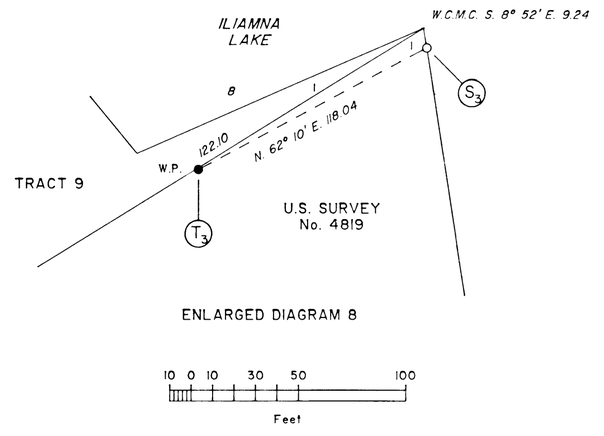

ENLARGED DIAGRAM 8

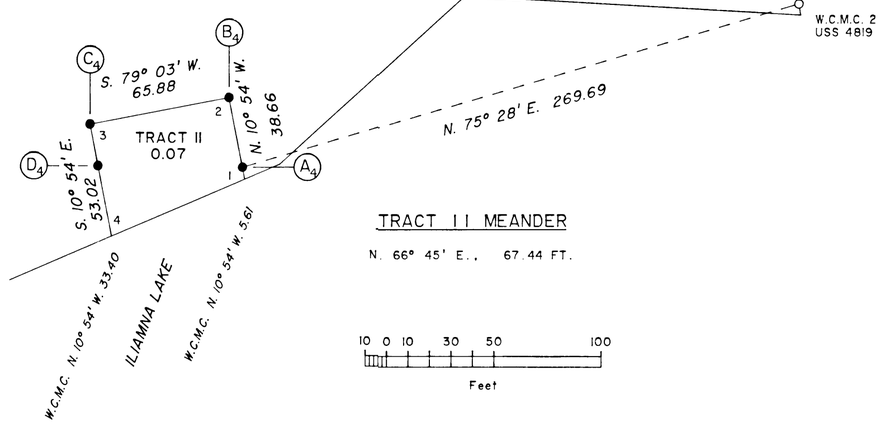

TRACT 11 MEANDER

N. 66° 45' E., 67.44 FT.

10 0 10 30 50 100
Feet

TRACT 10 MEANDERS

1. S. 58° 54' W.,	74.08 FT.
2. N. 77° 00' W.,	39.30 FT.

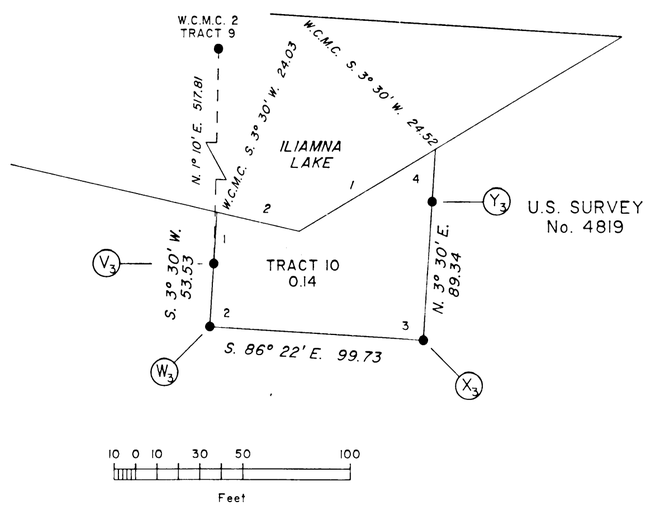

- ● Stainless Steel post, 2 1/2 ins. diam., 28 ins. long.
- ○ Recovered monument.
- ■ Rebar 5/8 in. diam., 30 ins. long, with alum. cap.

92-10

RECORDED - FILED - Iliamna REC. DIST
DATE 10/26 19 92
TIME 11:10 A M
Transmitted by USA(BLM)
Address

J.A.P.

DUPLICATE **ORIGINAL**

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c) TRACTS I THROUGH II
(P.L. 92-203, 85 STAT. 688, 702, 703)
PEDRO BAY CORPORATION
AT
PEDRO BAY, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

A



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 7 ins. diam., bears N. 12 1/2° E., 60.0 ft. dist., mkd. S7333 C2 BT on partially healed blaze.

A spruce, 8 ins. diam., bears N. 55 1/2° W., 30.0 ft. dist., mkd. C2 S7333 BT on partially healed blaze.

B



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 1 in. below ground, with brass cap mkd. as shown, from which

A poplar, 16 ins. diam., bears S. 5° E., 9.0 ft. dist., mkd. X BT.

A poplar, 17 ins. diam., bears N. 73° W., 32.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

C



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 13 ins. diam., bears S. 2° E., 5.5 ft. dist., mkd. X BT on partially healed blaze.

A spruce, 11 ins. diam., bears N. 37° W., 10.0 ft. dist., mkd. S7333 C3 BT on partially healed blaze.

D



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. ANCSA 14C TR2 C20 S7333 C6 1987, remarked as shown, from which the original bearing trees

A poplar, 11 ins. diam., bears East, 21.0 ft. dist., mkd. X BT on partially healed blaze.

A poplar, 10 ins. diam., bears S. 6 1/2° E., 21.0 ft. dist., mkd. X BT on partially healed blaze.

E

Found an alum. post, 2 1/2 ins. diam., firmly set, flush with the ground, with alum. cap mkd. S7333 C7 C21 TR2 ANCSA 14C 1987, remarked as shown, from which the original bearing trees

A spruce, 8 ins. diam., bears S. 9° E., 20.0 ft. dist., mkd. X BT on partially healed blaze.

A spruce, 8 ins. diam., bears S. 55 1/2° W., 9.0 ft. dist., mkd. X BT on partially healed blaze.

F



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 10 ins. diam., bears S. 83° E., 36.5 ft. dist., mkd. X BT.

A spruce, 8 ins. diam., bears N. 63° W., 8.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

G



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 10 ins. diam., bears S. 78° E., 35.5 ft. dist., mkd. X BT.

A spruce, 9 ins. diam., bears N. 11° W., 56.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

H



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears N. 37° E., 56.0 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears S. 84° E., 39.5 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

I



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears N. 16° E., 53.5 ft. dist., mkd. X BT.

A spruce, 9 ins. diam., bears S. 66° W., 39.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

J



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

Dig pits, 18 X 18 X 12 ins., each way on line, 3 ft. dist.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

K



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears S. 86° E., 46.5 ft. dist., mkd. X BT.

A spruce, 8 ins. diam., bears S. 8° W., 28.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

L



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears S. 40° E., 16.0 ft. dist., mkd. X BT.

A spruce, 8 ins. diam., bears S. 86° W., 29.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

M



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 10 ins. diam., bears S. 22° W., 7.0 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears N. 49° W., 28.5 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

N



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears S. 57° E., 5.5 ft. dist., mkd. X BT.

A spruce, 9 ins. diam., bears S. 17° W., 17.5 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

O



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears S. 64° E., 16.5 ft. dist., mkd. X BT.

A spruce, 12 ins. diam., bears N. 61° W., 5.5 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

P



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears S. 10° W., 32.5 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears N. 17° W., 18.5 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

Q



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 10 ins. diam., bears S. 1° E., 57.0 ft. dist., mkd. X BT.

A spruce, 9 ins. diam., bears S. 75° W., 58.5 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

R



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. below the ground, with brass cap mkd. as shown, from which

Raise a mound of stone, 4 ft. base, 2 1/2 ft. high, on line NE of cor. 13 ft. dist.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

S



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 11 ins. diam., bears N. 16° E., 15.0 ft. dist., mkd. X BT.

A spruce, 8 ins. diam., bears N. 73° W., 31.5 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

T



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears S. 65° W., 19.0 ft. dist., mkd. X BT.

A spruce, 8 ins. diam., bears N. 21° W., 12.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

U



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 5 ins. diam., bears S. 18° W., 104.5 ft. dist., mkd. X BT.

A spruce, 5 ins. diam., bears N. 75° W., 285.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

V



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

The SW cor. of a log shed, 8 X 8 ft., one side extendes N. 20° W., bears S. 82° E., 11.0 ft. dist.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

W



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which

An I beam, 3 ft. high, on the NE portion of a guardrail, bears S. 62° E., 2.5 ft. dist., mkd. X BO.

An I beam, 3 ft. high, on the NE portion of a guardrail, bears N. 32° W., 3.5 ft. dist., mkd. X BO.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

X



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 8 ins. diam., bears N. 34° E., 88.0 ft. dist., mkd. X BT.

A spruce, 18 ins. diam., bears S. 72° E., 161.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

Y



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

No accesories available.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

The term DEEP-1 magnet refers to a magnetic marker composed of strontium encased in a color coded plastic container. The units are 1 inch diameter and 2 1/2 inches long.

J.A.P.

DUPLICATE **ORIGINAL**

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS I THROUGH II (P.L. 92-203, 85 STAT. 688, 702, 703) PEDRO BAY CORPORATION AT PEDRO BAY, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

(Z)

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which

Dig pits, 18 X 18 X 12 ins., on line NE of cor., 3 ft. and 6 ft. dist.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

(A_1)



Found an alum. rod, 5/8 in. diam., firmly set, projecting 12 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 8 ins. diam., bears S. 86° W., 326.5 ft. dist., mkd. C5 LI S6175 BT on partially healed blaze.

A spruce, 11 ins. diam., bears N. 73 1/2° W., 278.5 ft. dist., mkd. X BT on partially healed blaze.

(B_1)



Found an alum. rod, 5/8 in. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A dead spruce, 4 ins. diam., bears N. 76° W., 100.5 ft. dist., mkd. X BT on partially healed blaze.

A dead spruce, 6 ins. diam., bears N. 22° W., 258.5 ft. dist., mkd. X BT on partially healed blaze.

(C_1)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which

Dig pits, 18 X 18 X 12 ins., each way on line, 3 ft. dist.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

(D_1)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears S. 47° W., 8.0 ft. dist., mkd. X BT.

A spruce, 12 ins. diam., bears N. 32° W., 35.5 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

(E_1)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 4 ins. diam., bears N. 30° E., 2.0 ft. dist., mkd. X BT.

A rock face, 12 ft. wide, 9 ft. high, bears N. 65° W., 11.0 ft. dist., mkd. X BO.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

(F_1)



Found an alum. post, 2 1/2 in. diam., firmly set, projecting 12 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A stump, 6 ft. high, 9 ins. diam., bears N. 89° E., 39.5 ft. dist., mkd. X BT on partially healed blaze.

A dead spruce, 11 ins. diam., bears S. 31° E., 92.5 ft. dist., mkd. S5201 LI C5 BT on partially healed blaze.

A dead spruce, 5 ins. diam., bears N. 62° W., 44.0 ft. dist., mkd. X BT on partially healed blaze.

from which new bearing trees

A spruce, 9 ins. diam., bears N. 72° E., 39.5 ft dist., mkd. X BT.

A spruce, 5 ins. diam., bears N. 43° W., 33.0 ft. dist., mkd. X BT.

(G_1)



Found an iron post, 2 1/2 in. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown, from which the 1969 bearing trees

A spruce, 16 ins. diam., bears S. 24° W., 55.5 ft. dist., mkd. with fragmented scribing on partially healed blaze.

A spruce, 18 ins. diam., bears N. 69 1/2° W., 68.0 ft. dist., mkd. with fragmented scribing on partially healed blaze.

from which the 1974 bearing trees

A spruce, 16 ins. diam., bears N. 18° E., 55.0 ft. dist., mkd. with fragmented scribing on partially healed blaze, (record 87 lks.)

A dead spruce, 13 ins. diam., bears S. 46° E., 25.5 ft. dist., mkd. with fragmented scribing on partially healed blaze.

(H_1)



Found an iron post, 2 1/2 in. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 18 ins. diam., bears S. 63° E., 20.5 ft. dist., mkd. with fragmented scribing on partially healed blaze.

A fallen spruce, 15 ins. diam., bears S. 13° E., 72.5 ft. dist., mkd. S5577 LI C4 BT on partially healed blaze, (record S. 31° W.)

from which a new bearing tree

A spruce, 9 ins. diam., bears S. 70° W., 5.5 ft. dist., mkd. X BT.

(I_1)

Found an iron post, 2 1/2 in. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 14 ins. diam., bears N. 82° E., 119.5 ft. dist., mkd. with fragmented scribing on partially healed blaze.

A spruce, 11 ins. diam., bears S. 55° E., 41.0 ft. dist., mkd. with healed blaze.

(J_1)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, in a collar of stone, 18 ins. diam., with brass cap mkd. as shown

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

(K_1)



Drive a rebar, 30 ins. long, 5/8 in. diam., 25 ins. in the ground, with alum. cap mkd. as shown

(L_1)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a collar of stone, 18 ins. diam., with brass cap mkd. as shown

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

(M_1)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

(N_1)



Drive a rebar, 30 ins. long, 5/8 in. diam., 27 ins. in the ground, with alum. cap mkd. as shown

(O_1)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, in a collar of stone, 18 ins. diam., with brass cap mkd. as shown

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

(P_1)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears N. 63° E., 20.5 ft. dist., mkd. X BT.

A spruce, 12 ins. diam., bears S. 25° E., 24.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

(Q_1)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, in a collar of stone, 18 ins. diam., with brass cap mkd. as shown, from which

A spruce, 14 ins. diam., bears S. 23° E., 18.5 ft. dist., mkd. X BT.

A spruce, 12 ins. diam., bears S. 50° W., 44.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of stainless steel post.

(R_1)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 16 ins. diam., bears S. 3° W., 90.0 ft. dist., mkd. X BT.

A spruce, 23 ins. diam., bears S. 70° W., 31.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of stainless steel post.

(S_1)



Found an alum. rod, 5/8 in. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 13 ins. diam., bears S. 86° E., 26.5 ft. dist., mkd. S6117 C3 BT on partially healed blaze.(Record, mkd. X BT)

A spruce, 11 ins. diam., bears S. 1° W., 148.0 ft. dist., mkd. X BT on partially healed blaze.(Record, mkd. S6117 C3 BT)

(T_1)



Found an alum. rod, 5/8 in. diam., firmly set, projecting 12 ins. above ground, in a collar of stone, 24 ins. diam., with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 13 ins. diam., bears S. 71° E., 205.5 ft. dist., mkd. S6117 C2 BT on partially healed blaze.

A spruce, 11 ins. diam., bears S. 71° W., 204.0 ft. dist., mkd. X BT on partially healed blaze.

(U_1)



Found an alum. rod, 3/4 in. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 8 ins. diam., bears S. 31 3/4° E., 40.5 ft. dist., mkd. X BT on partially healed blaze.

A spruce, 12 ins. diam., bears N. 70 1/2° W., 79.5 ft. dist., mkd. X BT on partially healed blaze.

(V_1)



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 8 ins. diam., bears N. 63° E., 54.0 ft. dist., mkd. X BT on partially healed blaze.

A spruce, 12 ins. diam., bears S. 51° E., 80.0 ft. dist., mkd. C3 S7962 BT on partially healed blaze.

(W_1)



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 5 ins. diam., bears N. 24° E., 14.0 ft. dist., with healed blaze.

A spruce, 4 ins. diam., bears S. 81° W., 2.0 ft. dist., with healed blaze.

A spruce, 5 ins. diam., bears N. 30° W., 8.0 ft. dist., with healed blaze.

(X_1)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 12 ins. diam., bears S. 13° E., 50.0 ft. dist., mkd. X BT.

A spruce, 13 ins. diam., bears N. 77° W., 66.5 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of stainless steel post.

The term DEEP-1 magnet refers to a magnetic marker composed of strontium encased in a color coded plastic container. The units are 1 inch diameter and 2 1/2 inches long.

92-10

RECORDED - FILED
IUAMNA REC. DIST.
DATE 10/26 1992
TIME 11:10 A M
Recorded by (USA:18cm)
Address

J.A.P.

DUPLICATE ORIGINAL

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS I THROUGH II (P.L. 92-203, 85 STAT. 688, 702, 703) PEDRO BAY CORPORATION AT PEDRO BAY, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

Y_1



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. below ground, with brass cap mkd. as shown

Bury a clear DEEP-I magnet at the base of the stainless steel post.

Z_1



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 8 ins. diam., bears N. 51 1/4° E., 16.0 ft. dist., mkd. with fragmented scribing on partially healed blaze.

A spruce, 14 ins. diam., bears S. 57 1/2° E., 21.0 ft. dist., mkd. with fragmented scribing on partially healed blaze.

A_2



Found an iron post, 1 in. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown, from which the 1982 bearing trees

A spruce, 11 ins. diam., bears S. 33° W., 53.0 ft. dist., mkd. X BT on partially healed blaze.

A spruce, 9 ins. diam., bears S. 88° W., 63.5 ft. dist., mkd. X BT on partially healed blaze.

B_2



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 3 ins. below ground, with brass cap mkd. as shown

Bury a clear DEEP-I magnet at the base of the stainless steel post.

C_2



Found an alum. rod, 3/4 in. diam., firmly set, projecting 12 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 7 ins. diam., bears S. 46° E., 161.5 ft. dist., mkd. with fragmented scribing on partially healed blaze.

A spruce, 10 ins. diam., bears S. 75° W., 42.0 ft. dist., mkd. X BT on partially healed blaze.

D_2

Found an iron post, 1 in. diam., firmly set, projecting 3 ins. above ground.

E_2



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, in a collar of stone, 18 ins. diam., with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 15 ins. diam., bears S. 23 3/4° E., 18.0 ft. dist., mkd. X BT on partially healed blaze.

A spruce, 13 ins. diam., bears S. 62 1/4° W., 79.0 ft. dist., mkd. with fragmented scribing on partially healed blaze.

F_2



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 15 ins. diam., bears N. 71° E., 17.0 ft. dist., mkd. X BT.

A spruce, 4 ins. diam., bears S. 84° W., 27.5 ft. dist., mkd. X BT.

G_2

Found an iron post, 1 in. diam., firmly set, projecting 4 ins. above ground, top bent west.

H_2

Found an iron post, 1 in. diam., firmly set, 4 ins. below ground.

I_2

Found an iron post, 1 in. diam., firmly set, projecting 5 ins. above ground, top bent west.

J_2



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Bury a clear DEEP-I magnet at the base of the stainless steel post.

K_2



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. below the ground, with brass cap mkd. as shown

Bury a clear DEEP-I maghet at the base of the stainless steel post.

L_2



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the ground, with brass cap mkd. as shown

Bury a clear DEEP-I magnet at the base of the stainless steel post.

M_2



Found an alum. rod, 5/8 in. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A birch, 5 ins. diam., bears N. 10° E., 86.5 ft. dist., mkd. X BT.

A spruce, 21 ins. diam., bears N. 36° W., 46.0 ft. dist., mkd. X BT on partially healed blaze.

N_2



Found an alum. rod, 3/4 in. diam., firmly set, projecting 12 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 11 ins. diam., bears South, 35.0 ft. dist., mkd. X BT on partially healed blaze.

A spruce, 10 ins. diam., bears N. 36° W., 78.5 ft. dist., mkd. X BT on partially healed blaze.

O_2



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce stump, 10 ins. diam., 18 ins. high, bears S. 3° E., 60.5 ft. dist., mkd. BT.

A spruce stump, 14 ins. diam., 5 ft high, bears S. 35 1/2° W., 60.5 ft. dist., mkd. WC S5577 L2 C4 BT.

and the 1974 bearing trees

A spruce, 6 ins. diam., bears N. 10° E., 52.0 ft. dist., with healed blaze.

A spruce, 15 ins. diam., bears N. 80° E., 79.0 ft. dist., mkd. X BT on partialy healed blaze.

P_2

Found an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce stump, 10 ins. diam., 36 ins. high, bears S. 20° W., 78.0 ft. dist., mkd. BT.

A spruce stump, 12 ins. diam., 5 ft high, bears N. 53 1/2° W., 53.5 ft. dist., mkd. WC S5577 L2 CI MC BT.

Q_2



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 8 ins. diam., bears N. 57° E., 39.0 ft. dist., mkd. X BT on partially healed blaze.

A spruce, 10 ins. diam., bears N. 1 1/2° W., 35.0 ft. dist., mkd. X BT on partially healed blaze.

R_2



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. below the ground, with brass cap mkd. as shown

Bury a clear DEEP-I magnet at the base of stainless steel post.

S_2

Found a spruce corner tree, 7 ins. diam., mkd. with fragmented scribing on partially healed blaze, on the NW side of the tree, from which

An alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. RM II LKS 1986 and an arrow pointing to the cor. tree, bears S. 60° W., 7.5 ft. dist.

An alum. post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with alum. cap mkd. RM 10 LKS C4 S7889 1986 and an arrow pointing to the cor. tree, bears N. 30° W., 6.5 ft. dist.

T_2

Found an alum. rod, 3/4 ins. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 7 ins. diam., bears N. 7 1/2° E., 62.0 ft. dist., mkd. X BT on partially healed blaze.

A spruce, 11 ins. diam., bears S. 50° E., 47.5 ft. dist., mkd. X BT on partially healed blaze.

U_2



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the ground, with brass cap mkd. as shown

Bury a clear DEEP-I magnet at the base of stainless steel post.

V_2



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 15 ins. diam., bears N. 39 1/2° E., 16.5 ft. dist., mkd. X BT on partially healed blaze.

A spruce, 11 ins. diam., bears S. 27° W., 26.5 ft. dist., mkd. X BT on partially healed blaze.

W_2



Found an alum. rod, 3/4 ins. diam., firmly set, projecting 12 ins. above ground, in a collar of stone, 18 ins. diam., with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 8 ins. diam., bears S. 16 1/2° E., 50.0 ft. dist., mkd. X BT on partially healed blaze.

A spruce, 9 ins. diam., bears S. 66 3/4° W., 51.0 ft. dist., mkd. C5 LI S6158 BT on partially healed blaze.

The term DEEP-I magnet refers to a magnetic marker composed of strontium encased in a color coded plastic container. The units are 1 inch diameter and 2 1/2 inches long.

92-10

RECORDED - FILED
JUNEAU REC. DIST
DATE 10/26 19 92
TIME 11:10 A.M.
Recorded by CLSA/BM
Address

J.A.P.

DUPLICATE **ORIGINAL**

SHEET 10 OF 11

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS I THROUGH II (P.L. 92-203, 85 STAT. 688, 702, 703) PEDRO BAY CORPORATION AT PEDRO BAY, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

X_2



Drive a rebar, 30 ins. long, 5/8 in. diam., 25 ins. in the ground, with alum. cap mkd. as shown

Y_2



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

Z_2



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, in a collar of stone, 18 ins. diam., with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 8 ins. diam., bears S. 34 1/2° W., 14.5 ft. dist., mkd. X BT on partially healed blaze.

A spruce, 10 ins. diam., bears N. 40 1/2° W., 22.0 ft. dist., mkd. C4 LI S6158 BT on partially healed blaze.

A_3



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, in a collar of stone, 18 ins. diam., with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 7 ins. diam., bears S. 81 1/2° E., 17.0 ft. dist., mkd. X BT on partially healed blaze.

A spruce, 9 ins. diam., bears S. 9 1/2° E., 16.0 ft. dist., mkd. X BT on partially healed blaze.

B_3



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 10 ins. diam., bears S. 80° E., 28.5 ft. dist., mkd. X BT.

A spruce, 9 ins. diam., bears S. 65° W., 28.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

C_3



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 12 ins. diam., bears S. 58° E., 16.5 ft. dist., mkd. X BT.

A spruce, 14 ins. diam., bears S. 63° W., 43.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

D_3



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, encircled by a mound of stone, 3 ft. base to top, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears N. 86° E., 20.5 ft. dist., mkd. X BT.

A spruce, 10 ins. diam., bears N. 8° W., 23.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

E_3



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 8 ins. diam., bears S. 19° W., 7.0 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears N. 46° W., 37.5 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

F_3



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 9 ins. above ground, set in a mound of stone, 3 ft. base, to top of cap, with alum. cap mkd. as shown, from which the original bearing trees

A fallen spruce, 9 ins. diam., bears N. 55° E., 31.0 ft. dist., mkd. with fragmented scribing.

A fallen spruce, 7 ins. diam., bears N. 44° W., 114.0 ft. dist., mkd. T4S R28W S34 SC BT on partially healed blaze.

from which new bearing trees

A spruce, 6 ins. diam., bears East 28.5 ft. dist., mkd. X BT.

A spruce, 20 ins. diam., bears S. 24° W., 90.0 ft. dist., mkd. X BT.

G_3



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 13 ins. in the ground, encircled by a mound of stone, 3 ft. base to top, with brass cap mkd. as shown, from which

A spruce, 12 ins. diam., bears N. 13° E., 69.5 ft. dist., mkd. X BT.

A spruce, 8 ins. diam., bears S. 35° E., 14.0 ft. dist., mkd. X BT.

H_3



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears N. 28° E., 8.0 ft. dist., mkd. X BT.

A spruce, 8 ins. diam., bears S. 25° E., 17.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

I_3



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 14 ins. diam., bears N. 52° E., 35.0 ft. dist., mkd. X BT.

A spruce, 13 ins. diam., bears N. 70° W., 46.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

J_3



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 11 ins. diam., bears N. 1° E., 18.5 ft. dist., mkd. X BT.

A spruce, 18 ins. diam., bears N. 52° E., 37.5 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

K_3



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 8 ins. diam., bears N. 78° E., 76.5 ft. dist., mkd. X BT on partially healed blaze.

A spruce, 14 ins. diam., bears N. 56° W., 42.0 ft. dist., mkd. X BT on partially healed blaze.

L_3



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 10 ins. diam., bears S. 37° E., 51.0 ft. dist., mkd. C4 L2 S7525 BT on partially healed blaze.

A spruce, 7 ins. diam., bears N. 66° W., 20.0 ft. dist., mkd. X BT on partially healed blaze.

M_3



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown

Bury a clear DEEP-1 magnet at the base of stainless stee: post.

N_3



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 7 ins. diam., bears N. 77 1/2° E., 53.5 ft. dist., mkd. X BT on partially healed blaze.

A spruce, 8 ins. diam., bears N. 70° W., 15.0 ft. dist., mkd. C3 L4 S7525 BT on partially healed blaze.

O_3



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown

Bury a clear DEEP-1 magnet at the base of stainless steel post.

Found an iron post, 2 1/2 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce stump, 14 ins. high, bears S. 20° W., 39.5 ft. dist., mkd. BT on partially healed blaze.

A spruce stump, 1 in. high., bears S. 56 1/2° E., 22.0 ft. dist., no mks.

From which a 1984 bearing tree

A dead spruce, 10 ins. diam., bears N. 3° E., 32.5 ft. dist., mkd. C2 L4 S7525 BT on partially healed blaze (Record, N. 1° W.)

From which new bearing trees

A spruce, 8 ins. diam., bears N. 64° E., 12.0 ft. dist., mkd. X BT.

A spruce, 8 ins. diam., bears S. 40° E., 12.0 ft. dist., mkd. X BT.

P_3



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 10 ins. diam., bears N. 86° W., 75.0 ft. dist., mkd. with fragmented scribing on partially healed blaze,

A spruce, 8 ins. diam., bears N. 53° W., 17.0 ft. dist., mkd. with fragmented scribing on partially healed blaze.

Q_3



R_3



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 13 ins. diam., bears N. 34° E., 171. Oft. dist., mkd. with fragmented scribing on partially healed blaze,

A spruce, 10 Ins. diam., bears N. 82° E., 40.5 ft. dist., mkd. with fragmented scribing on partially healed blaze.

From which a new bearing tree.

A spruce, 10 ins. diam., bears S. 30° W., 34.0 ft. dist., mkd. X BT.

S_3



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 9 ins. diam., bears S. 4° W., 11.0 ft. dist., mkd. with fragmented scribing on partially healed blaze.

A dead spruce, 10 ins. diam., bears S. 19° W., 28.0 ft. dist., mkd. with fragmented scribing on partially healed blaze.

T_3



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 13 ins. diam., bears S. 62° E., 6.5 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears S. 82° W., 12.5 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of stainless steel post.

U_3

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, encircled by a mound of stone, 3 ft. base to top, with brass cap mkd. as shown, from which

A spruce, 10 ins. diam., bears N. 18° E., 30.5 ft. dist., mkd. X BT.

A spruce, 8 ins. diam., bears East, 14.5 ft. dist., mkd. X BT.

V_3

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown

The term DEEP-1 magnet refers to a magnetic marker composed of strontium encased in a color coded plastic container. The units are 1 inch diameter and 2 1/2 inches long.

92-10

RECORDED - FILED
IVANA REC. DIST.
DATE 10/26 19 92
TIME 11:10 A M
Recorded by (USA/BLM)
Address

J.A.P.

DUPLICATE **ORIGINAL**

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c) TRACTS I THROUGH II
(P.L. 92-203, 85 STAT. 688, 702, 703)
PEDRO BAY CORPORATION
AT
PEDRO BAY, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

(W3)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Bury a clear DEEP-I magnet at the base of the stainless steel post.

(D4)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Bury a clear DEEP-I magnet at the base of the stainless steel post.

(X3)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Bury a clear DEEP-I magnet at the base of the stainless steel post.

The term DEEP-I magnet refers to a magnetic marker composed of strontium encased in a color coded plastic container. The units are 1 inch diameter and 2 1/2 inches long.

(Y3)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown

Bury a clear DEEP-I magnet at the base of the stainless steel post.

(Z3)



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 14 ins. diam., bears N. 81° E., 28.5 ft. dist., mkd. with fragmented scribing on partially healed blaze.

A spruce, 12 ins. diam., bears N. 41° W., 51.5 ft. dist., mkd. with fragmented scribing on partially healed blaze.

(A4)



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a collar of stone, 20 ins. diam., with brass cap mkd. as shown

(B4)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a collar of stone, 24 ins. diam., with brass cap mkd. as shown

Bury a clear DEEP-I magnet at the base of the stainless steel post.

(C4)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown

Bury a clear DEEP-I magnet at the base of the stainless steel post.

J.A.P.